



# BOURG BOOK COMPILER



Use the Bourg Book Compiler (BBC) to connect the BB3002 perfect binder In-Line behind a printer; or Off-Line/Dual-Mode behind a Bourg Sheet Feeder (BSF) to process jobs from other printers.

The BBC compiles sheets or single fold signatures, coming from the previous devices, and immediately transfers the compiled stack into the book binder. This automated procedure increases your productivity as it eliminates the need for an operator intervention and waiting time.



Fully autonomous In-Line binder, no human intervention



Binder works at constant maximum speed of up to 650 cycles/hour



Advantages of In-Line use



Flexibility to use one print finishing solution for several printers thanks to the BSF (Dual-mode)




Automatic barcode scanning for job tracking and to ensure job cover to content integrity (optional)



Upgrade your BB3002 to a BB3202 with the BBC

Each job is checked in order to avoid reprints; each job is recorded for job tracking; no manual job set-up.


Print to finish on-the-fly for increased productivity without losing book integrity.

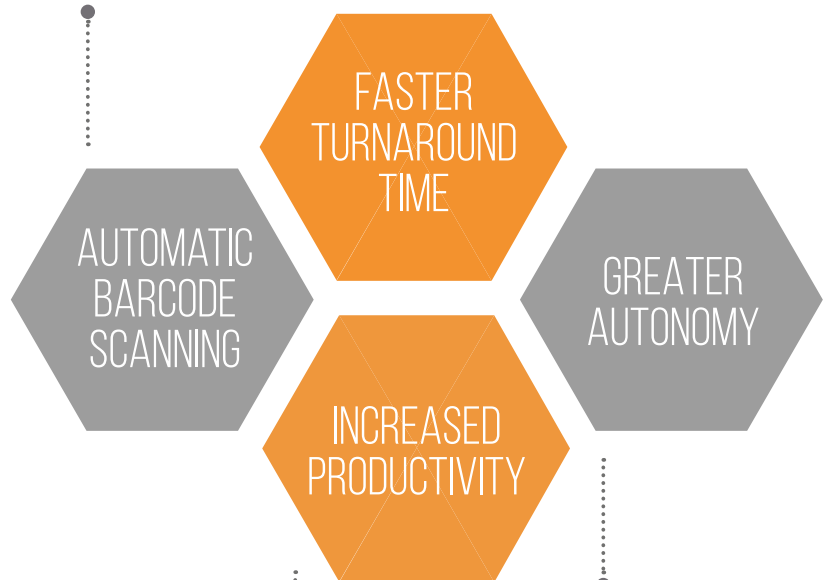

Fast compiling book blocks with thickness from 1 to 60 mm (0.04-2.36 in).

Reduce risk of errors and limit human intervention. The operator may work on several production lines while this solution works autonomously.



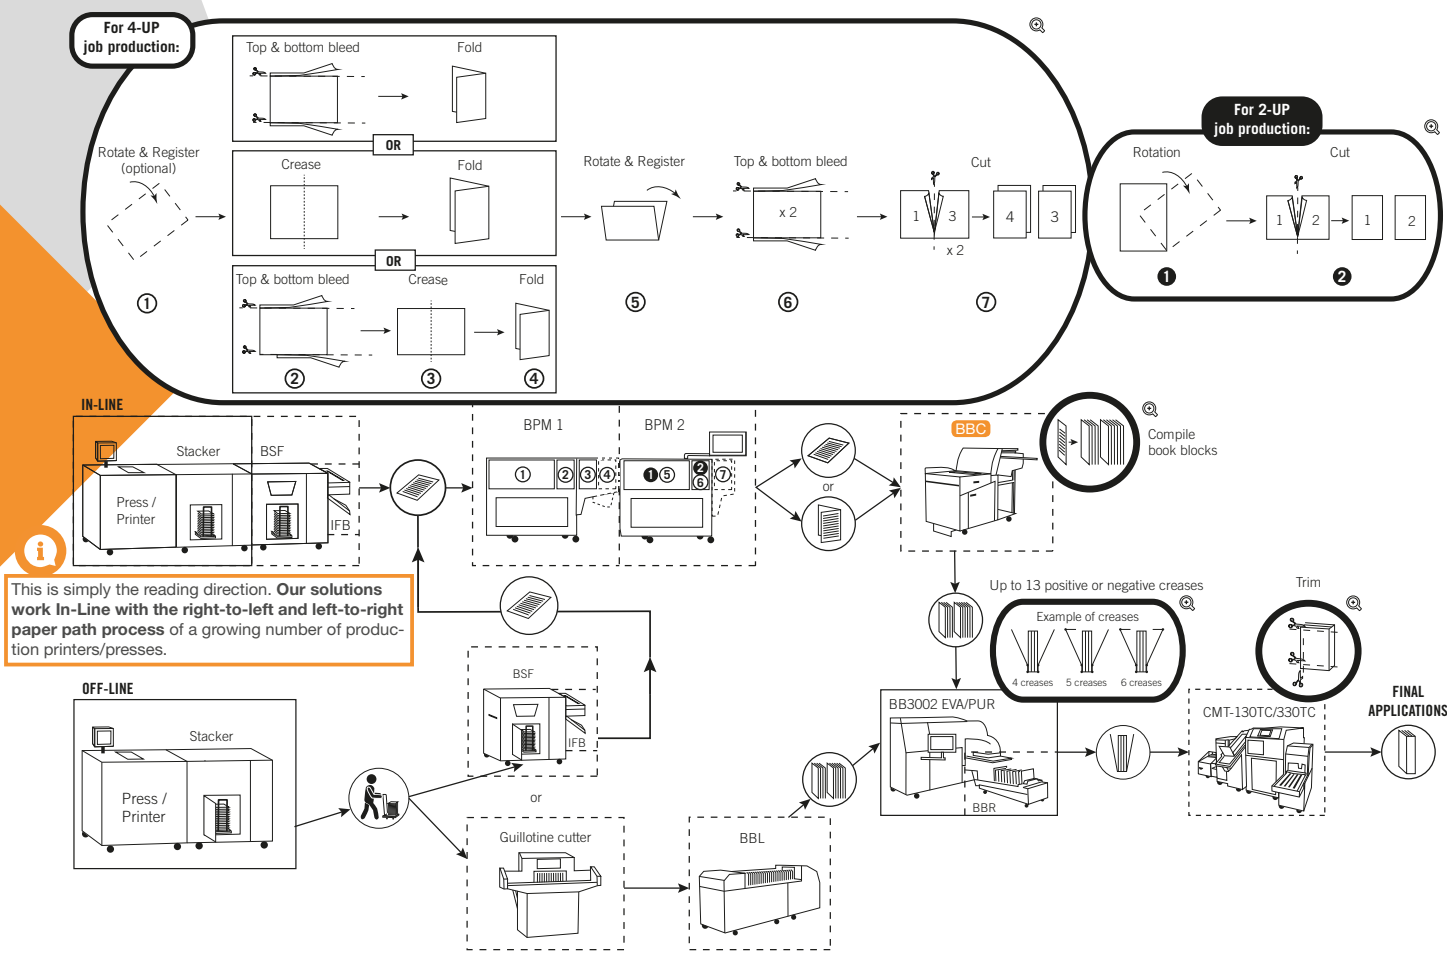

  
 Contact our local distributor to get your personalised solution  
[www.cpbourg.com/distributors](http://www.cpbourg.com/distributors)

## TECHNICAL SPECIFICATIONS

Media	
Maximum speed (feed rate) in In-Line mode	Matches printer speed
Maximum speed (feed rate) in Off-Line mode with a BSF	18,000 sheets/hour (A4 sheet, 90 gsm)
Maximum paper size of books with/without cover (perfect binding and padding modes)	370 x 320 mm (14.56 x 12.59 in)
Book thickness (perfect binding and padding modes)	1 to 60 mm (0.04 to 2.36 in)
Paper weight	60 to 200 gsm
Physical	
Dimensions (L x W x H)	150 x 85 x 145 cm (59.05 x 33.46 x 57.08 in)
Weight	300 kg (661 lbs)
Electrical	
Power supply	120V ±10%, 60Hz, 1 phase, 3A 230V ±10%, 50Hz, 1 phase, 1.5A

Options / Accessories	Connectability
Barcode systems	Bourg Sheet Feeder (BSF) Bourg Binder 3002 EVA / Hot melt (BB3002 EVA) Bourg Binder 3002 PUR-Compact (BB3002 PUR-C)

## MEDIA SIZES

