

PrintLamB2S

The user-friendly B2 laminating machine



Main reasons to choose a TAULER PrintLamB2S


- Because it incorporates the **TAULER_OIL** system that improves lamination and reduces energy consumption
- Because its quick adjustment of the film with the machine running
- Because it incorporates the **TAULER_SHAFT SYSTEM** that facilitates the quick change of film
- For its intuitive touch screen.
- Because it incorporates a **REVERSE MODE** to correct possible errors
- Because it incorporates **TAULER_GO ON**, an automatic starting system

PrintLamB2

The user-friendly B2 laminating machine

ADVANCED SPECIFICATIONS

- Automatic feeding
- Adjustable side bracket.
- Temperature control by sensor.
- Pneumatic pressure roller.
- Easily adjustable decurling system.
- Photocell that stops the machine in case of sheet failure.
- Total control of the machine through a PLC.
- Electronically adjustable speed
- Microperforation cutting system and scissor roller
- Optional stacker

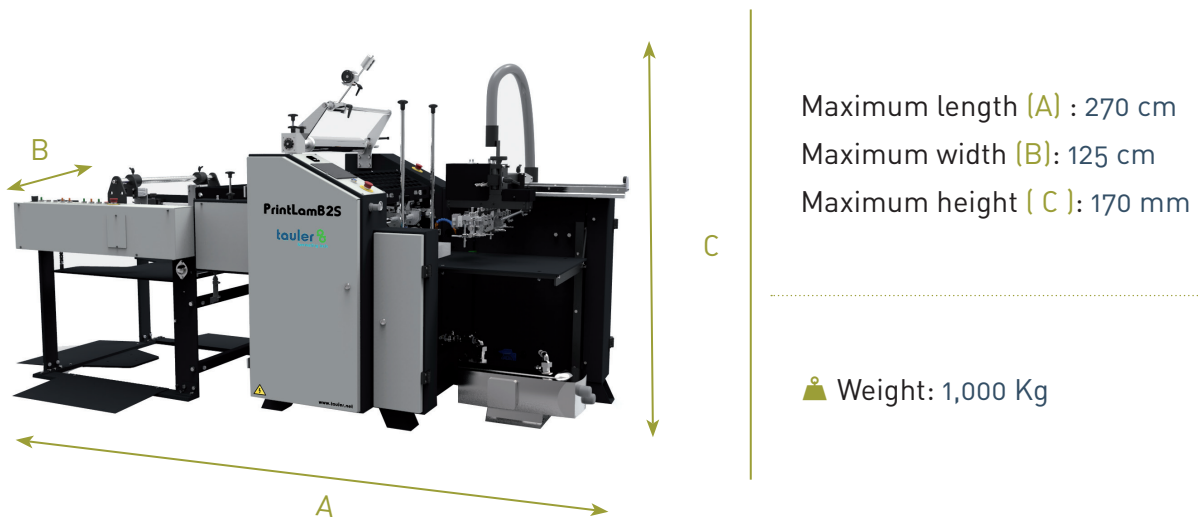

TECHNICAL DATA

Maximum sheet size	550x740 mm	Thickness of the film	20 to 42 microns
Minimum sheet size	220x250 mm	Installed power	9 KW
Speed	2 - 35 m / min *	Voltage	400 v three-phase 50 Hz
Paper grammage	130 to 450 gr / m2	Safety	Protections according to CE norm, emergency stops and safety sensors.
Maximum pile height	530mm		

(1) According to film, experience of operator and paper type, conditions, thickness and format.

The image shown and information given in this leaflet do not establish contractual information. TAULER reserves the right to modify the characteristics of this catalogue without prior notice. TAULER IS A REGISTERED TRADEMARK OF 4MES4 TAULER TECH, S.L.L